

539,958

Rec'd PCT/PTO 17 JUN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number  
**WO 2004/056242 A1**

(51) International Patent Classification<sup>7</sup>: **A47F 3/04**

(21) International Application Number:  
PCT/GB2003/005459

(22) International Filing Date:  
15 December 2003 (15.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
523377 20 December 2002 (20.12.2002) NZ

(71) Applicant (for all designated States except US): **CAD-BURY CONFECTIONERY LIMITED** [NZ/NZ]; 494 Rosebank Road, Avondale, Auckland (NZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROSS, Darryn**

[NZ/NZ]; 9 Klondyke Drive, Christchurch (NZ). **STUART, Rod** [NZ/NZ]; 168 Cumnor Terrace, Christchurch (NZ). **BISSETT, Andrew** [NZ/NZ]; 18b/125 The Strand, Parnell, Auckland (NZ).


(74) Agent: **WARD, David, I.**; Marks & Clerk, Alpha Tower, Suffolk Street Queensway, Birmingham B1 1TT (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: **CHILLER UNIT**

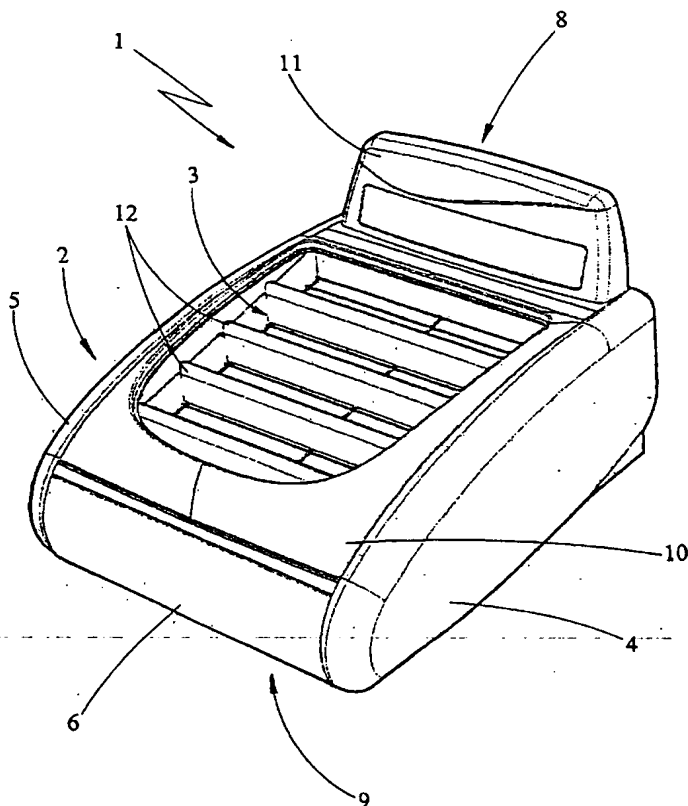

(57) Abstract: The invention provides an open topped refrigeration unit (1) which includes an outer case (2) having internal walls (4,5,6,7) and a base panel (19) defining an internal compartment (3), a refrigerated air generator (449), a duct (46), and a skirt (10). The duct (46) directs chilled air generated by the refrigerated air generator (449) around the internal compartment (3) and the skirt (10) is adapted to frame the open top of the internal compartment (3) and to direct the chilled air flow into the internal compartment (3).

WO 2004/056242 A1